
Applications Meters, Trucks, Textile





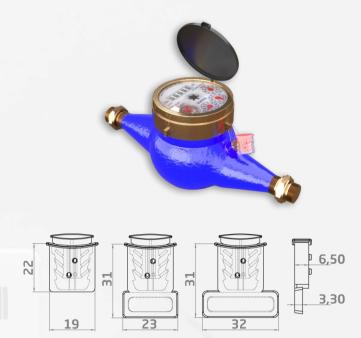

Product Description

- Made of Polycarbonate (PC) body, Polyacethale (POM) insert and steel sealing wire
- The insert is assembled into the body to prevent tampering before application
- Wires are supplied on rolls, or pre-cut on the side
- Optional longer flag (XL) on a White panel for barcode options.

- Laser printed numeration on the body and the insert
- Sealing wire options; Ø0,90 mm Stainless Steel Spiral, Ø0,90 mm Galvanised Steel Spiralised
- Complies with RoHS (Restriction of Hazardous Substances) Directive 2002/95/EC and its subsequent amendments
- Pull-apart strength: 15 Kgf
- Working temperature: -40°C / +120°C

Color Options

















GREEN

YELLOW